

SURVEYOR'S REPORT

THIS SURVEY IS BASED ON AN ASTRONOMIC BEARING FROM A FOUND STONE MARKING THE SOUTHEAST CORNER OF SECTION 10, T-10-N, R-1-E, TO A FOUND STONE MARKING THE SOUTHEAST CORNER OF THE SOUTHEAST 1/4 OF THE NORTHEAST 1/4 OF SAID SECTION 10.


CORNER "A" AS ILLUSTRATED ON THIS DRAWING IS MARKED BY A 3/4" IRON PIPE THAT WAS OBSERVED BY MYSELF JANUARY 11, 1984 (BOOK 649) AND HAS BEEN USED BY OTHER SURVEYORS. THE ORIGIN OF THIS IRON PIPE IS SOMEWHAT UNCERTAIN, HOWEVER, THE MEASUREMENT FROM THE SOUTHEAST CORNER OF SAID SECTION TO THIS PIPE IS REASONABLE CORRECT. IT HAS AN AUTHORITATIVE APPEARANCE EVEN BEING LOCATED A FEW FEET TO THE NORTH OF THE THEORETICAL SOUTH SECTION LINE. A DILIGENT SEARCH UNCOVERED NO STONE AT THE SOUTH 1/4 POSITION AND NO EVIDENCE WAS APPARENT WHICH SUGGESTED A SKEWED LINE WAS POSSIBLE.

APPROXIMATELY 130 FEET NORTH OF CORNER "A", A 1" IRON PIPE WAS FOUND. THIS 1" PIPE HAS THE SAME APPEARANCE AS ANOTHER 1" PIPE FOUND 82.27 FEET EAST OF THE SOUTHEAST CORNER STONE OF SAID SECTION 10. THE MEASUREMENT BETWEEN THESE TWO IDENTICAL PIPES MEASURES 1400.09 FEET AND INTERSECTS SEVERAL MARKED POINTS AS INDICATED ON THIS PRINT. NEITHER THE DIRECTION OR DISTANCE FITS ANY CALL IN ANY DEED DESCRIPTION PERTINENT TO THIS AREA. THE SOURCE OF THIS SKEWED LINE IS UNKNOWN. I DETERMINED THE 3/4" PIPE TO BE MORE FITTING AND CORRECT.

SEVERAL POINTS WERE SET ON LINE BY INSTRUMENT ALONG THE NORTH AND WEST OF THE NORTHEAST 1/4 OF THE NORTHEAST 1/4 OF SECTION 15, T-10-N, R-1-E, AND MARKED WITH STEEL FENCE POSTS. ALSO A 7/8" DIAMETER BY 18" LONG IRON BOLT WAS SET IN THE CENTER OF LOW GAP ROAD MARKING THE PROPERTY DIVISION BETWEEN THE STATE FORESTRY PROPERTY AND THE ADJOINING PRIVATE PROPERTIES.

THIS SURVEY WAS MADE UNDER THE REQUIREMENTS SET BY THE LAWS ESTABLISHED BY THE INDIANA GENERAL ASSEMBLY. CONSIDERING ALL ESTABLISHED CORNERS OF THIS SURVEYED AREA TO BE VALID, THE THEORETICAL UNCERTAINTY OF ANY MEASUREMENT OR CALL SHOULD BE NO MORE THAN 0.30 FEET IN ERROR.

Robert C. Vollmer, L.S.
No. 8-0160
10/22/93



not found
perhaps stone sec 15 E 1/4
is the one referenced.

STATE OF INDIANA DEPARTMENT OF NATURAL RESOURCES DIVISION OF ENGINEERING			
DESIGNED BY RCV	MORGAN - MONROE S.F.		
TRACED BY R.V.	SECTION 15 & 10 T.10N., R.1E. LOW GAP ROAD		
SUBMITTED BY			
DATE			
ENGINEER PLANNING & DESIGN			
APPROVED BY CHIEF ENGINEER	DATE		
APPROVED BY DIRECTOR DIVISION OF	DATE		
APPROVED BY DIRECTOR DEPT. OF NATURAL RESOURCES	DATE		
DATE MADE	DATES REVISED	SCALE	SHEET
9/10/93		AS SHOWN	20th 2 51-38

March 15th A.D. 1858

ran the following lines and Made the following corners in Section 11 S 9 R. 1. E. for David West Siram Meoy William Swisher & others.

length of the line E. & West through the center 324 poles 19 links

length North and South 328 poles $\frac{58}{100}$

length of the line east of center 161 poles $\frac{29}{100}$

length West do do 163 " $\frac{56}{100}$

length North do do 165 " $\frac{8}{100}$

length South do do 163 " $\frac{72}{100}$

corner Made at center white ash 18 inches diameter

N 23 $\frac{1}{2}$ ° W, 26 $\frac{1}{2}$ links dist. Maple 12 inches diameter S 82° E

20 links dist. corner Made and witness "Lice 80 poles

$\frac{48}{100}$ East of the center Sugar 10 inches diam S 65° W 24

links dist. B. Oak 15 in diam N 22 $\frac{1}{2}$ ° E 45 lbs dist

length of the line from the A & C cor to the Apr mile

post 163 poles $\frac{47}{100}$ corner Made equidistant between said

corners poplar 20 in diam N 84° W 29 lbs dist red Oak

6 inches diam N 25° W, 15 $\frac{1}{2}$ lbs dist corner Made at S E

corner of S & W quarter or $\frac{1}{4}$ white oak 36 inches diam N 32 $\frac{1}{2}$ ° W

23 $\frac{1}{2}$ links dist W. Oak 12 in diam S 87 $\frac{1}{2}$ ° W, 39 $\frac{1}{2}$ lbs distant

distance from M to R, 81 poles corner Made at M the S & W

corner of A & $\frac{1}{4}$ of A & E qtr witness B. Oak 20 inches diam

S 35° E 9 links dist Sugar 15 in diam N 82° W, 25 lbs dist

length of the line from the A & C cor of Sec 11, 163 poles

$\frac{76}{100}$ corner Made 81 poles $\frac{88}{100}$ poles South of of the A & W

corner witness "Lice W. Oak 18 inches diameter S 56° W 16 $\frac{1}{2}$

links dist corner and witness "Lice Made at the South

East corner of A & $\frac{1}{4}$ of A & W quarter R Oak 24 in diam

S 29° W 44 lbs dist

corner Made 81 poles & $\frac{98}{100}$ poles West of the center

Sugar 15 inches diam N 45° E 29 lbs dist Blk. Ash 6 in

diam S 35° E 42 $\frac{1}{2}$ links dist,

ran at the same time the following lot of land

Beginning at the Western $\frac{1}{2}$ mile post of Section No 11

S 9 R. 1. East then South 81 poles $\frac{70}{100}$ poles witness B. Oak

24 inches diam S 11° E 50 $\frac{1}{2}$ lbs dist "H. Oak N 65° E 44 $\frac{1}{2}$

lbs dist then N 85° E 81 poles $\frac{76}{100}$ poles to a stone corner

witness "Lice B. Ash 4 in diam N 20 $\frac{1}{2}$ ° W 6 lbs dist B.

ash 4 in diam S 48° E 22 lbs dist, then South 81 poles

$\frac{58}{100}$ poles then 81 poles $\frac{76}{100}$ poles to the Beginning

41. acres 3 quarters & 14 poles

Jacob West Gorge Swisher & Jacob Swisher
Chain Bearers Sworn by me

James W. Spencer
Monroe County Surveyor

Surveyed on Dec. 12. J. Y. R. 1877.
and established the following corners for James & others

- 1st Cor. center of section Mt. trees. Bench 10. N. 12 E. 39 6
Bench 16. N 66 W. 57 1/2
 2nd N.E. cor of N.W. q. of S.E. q. " Bench 12. S 35 W. 25
Bench 12. S 10 E. 47
 3rd Center of S.E. q. " Bench 10. N 45 E. 19
Elm. 18. N 68 W. 30
 4th South West cor of section B. Oak 6. S 42 W. 23
B. Oak 12. N 21 E. 28

Established the following in Sec 13. J. Y. R. 1877

D Dicks	D Dicks	D Dicks	A Holland Medford
		C B	
D Brough		O Chambers	

East

South

- Cor A Bench 14. S 26 W. 23 1/2
B. Oak 5. N 80 W. 21
 Cor B Bench 20. N 75 E. 23
Bench 18. N 54 W. 27
 Cor C Bench 18. S 25 E. 18
Bench 8. S 80 W. 24
 Cor D Stick 18. S 89 W. 14
N. Oak 8. N 47 E. 23
 Cor E Bench 14. N 51 W. 18
Maple 22. N 33 E. 22

Established at the same time the West 1/2 mile stake of Sec 11.
J. Y. R. 1877. Mt. trees Bench 14. N 30 E. 23 6 (to C. Woodward)

Honey Locust 4. S 63 E. 44

J. W. Spencer M. C. Lamm
& J. Woodburn Depts.

Established for Wm. Reddy in Sec 15 J. Y. R. 1877
the following corners

- 1st The N.E. cor of W. half of N.E. q. Mt. trees Stag 14. S 50 W. 21 6
Stag 7. S 40 E. 12

Cont

August the 17th 1861

Ran the following lines in Section 22 Town 10 Range No 1 East for the Trustees of the Honey Creek Church commenced at the N E corner of School House lot No 1 in said Section Town & Range ran N 85° E 5 poles & 12 links corner made and rock planted Witness B Ash 6 inches in Diam S 71½° E 22½ lbs dist thens S 5° E 12 poles & 12 links corner made and rock planted Witness A Oak 10 inches in Diam N 9° E 111 lbs dist thens S 69° W 5 poles & 18½ links to the S. E. corner of said School House lot thens N 5° W 15 poles & 3 links to the place of beginning J. J. Henderson & J. J. Bates have Bars by consent for \$2-50 Donated

S. S. Buskirk. M. C. S

August the 20th 1861

Ran the following lines in Section (11) Elwin Town (9) Mine Range (13) One East for William Mc Kee David West Jacob Swisher Jun & Jacob Swisher Sen commenced at the N. E. corner of Section 11 Ran S 85° W 81 poles & 6 links Witness Sugar 6 inches in diameter N 13° E 5 links dist Sugar 10 inches in diam S 55° E 21 links dist thens S 6° E 81 poles & 10 links Witness Hickory 15 inches in diameter N 75½° E 35½ lbs dist W Oak 30 " " " S 15½° W 19 lbs dist thens S 6° E 81 poles & 10 links Witness B Oak 18 inches in diameter S 58° W 20 lbs dist W Oak 28 inches in diameter N 25° E 65½ lbs dist thens N 6° W 12 poles & 16 links to a stake thens S 85° W 12 poles & 16 links to a stake thens S 76° W 36 poles & 1 links to a stake thens S 6° E 8 poles & 16 links to a stake thens N 84° E 28 poles & 9 links Chan Barers David Swisher & Stephen Dawson sworn } for William Mc Kee \$3-00 paid & exp full

David West " 1-50

Jacob Swisher Jun " 1-00 paid

Jacob Swisher Sen " 1-00 Paid

S. S. Buskirk, M. C. S

March 11th A.D. 1858.

ran the following lines and Made the following corners in Section 11. S 9 R. 1. E. for David West Siram Meoy William Swisher & others.

length of the line E. & West through the center 324 poles 19 links

length North and South 328 poles $\frac{56}{100}$

length of the line east of center

161 poles $\frac{22}{100}$

length West 160

163. " $\frac{56}{100}$

length North 160

165 " $\frac{8}{100}$

length South 160

163. " $\frac{72}{100}$

corner Made at center white ash 18 inches diameter

N 23 $\frac{1}{2}$ ° W, 26 $\frac{1}{2}$ links dist. Maple 12 inches diameter S 82° E

20 links dist. corner Made and witness "Lice 80 poles

$\frac{49}{100}$ East of the center Sugar 10 inches diam S 65° W 24

links dist. B. Oak 15 in diam N 22 $\frac{1}{2}$ ° E 45 lbs dist

length of the line from the N E cor to the N $\frac{1}{2}$ mile

post 163 poles $\frac{77}{100}$ corner Made equidistant between said

corners poplar 20 in diam N 84° W 29 lbs dist red Oak

6 inches diam N 25° W, 15 $\frac{1}{2}$ lbs dist corner Made at S E

corner of S $\frac{1}{2}$ quarter or $\frac{1}{4}$ white oak 36 inches diam N 32 $\frac{1}{2}$ ° W

23 $\frac{3}{4}$ links dist W. Oak 12 in diam S 87 $\frac{1}{2}$ ° W, 39 $\frac{3}{4}$ lbs distant

Distance from M to R, 81 poles corner Made at M the S $\frac{1}{2}$ W

corner of A $\frac{1}{2}$ of A E qtr witness B. Oak 20 inches diam

S 35° E 9 links dist Sugar 15 in diam N 82° W, 25 lbs dist

length of the line from the N W cor of Sec 11, 163 poles

$\frac{76}{100}$ corner Made 81 poles $\frac{88}{100}$ poles South of of the N W

corner witness "Lice W. Oak, 18 inches diameter S 56° W 16 $\frac{1}{2}$

links dist corner and witness "Lice Made at the South

East corner of A $\frac{1}{2}$ of A $\frac{1}{2}$ quarter R Oak 24 in diam

S 29° W 44 lbs dist

corner Made 81 poles & $\frac{98}{100}$ poles West of the center

Sugar 15 inches diam N 45° E 29 lbs dist Blk. Ash 6 in

diam S 32° E 42 $\frac{1}{2}$ links dist,

ran at the same time the following lot of land

Beginning at the Western $\frac{1}{2}$ mile post of Section No 11

S 9 R. 1. East then South 81 poles $\frac{70}{100}$ poles witness B. Oak

24 inches diam S 17° E 50 $\frac{3}{4}$ lbs dist "W. Oak N 65° E 44 $\frac{1}{2}$

lbs dist then N 85° E 81 poles $\frac{70}{100}$ poles to a stone corner


witness "Lice B. Ash 4 in diam N 20 $\frac{1}{2}$ ° W 6 lbs dist B.

ash 4 in diam S 48° E 22 lbs dist, then South 81 poles

$\frac{88}{100}$ poles then 81 poles $\frac{76}{100}$ poles to the Beginning

41. acres 3 quarters & 14 poles
 Jacob West George Swisher & Jacob Swisher
 Chain Bearers Sworn by me
 James W. Spencer
 Monroe County Surveyor

Surveyed in Sec. 12. T. 7. R. 1 W.
 and established the following corners for Himes & others
 1st Cor. center of section Mt. Trees. Beech 10. N. 12 E. 39 1/2
 Beech 16. N 66 W. 57 1/2
 2nd N.E. cor of N.W. q. of S.E. q. Beech 12. S 35 W. 25
 Beech 12. S 10 E. 47
 3rd Center of S.E. q. Beech 10 N 45 E. 19
 Elm 18. N 68 W. 30
 4th South West cor of section B. Oak 6. S 42 W. 2 1/2
 B. Oak 12. N 21 E. 28

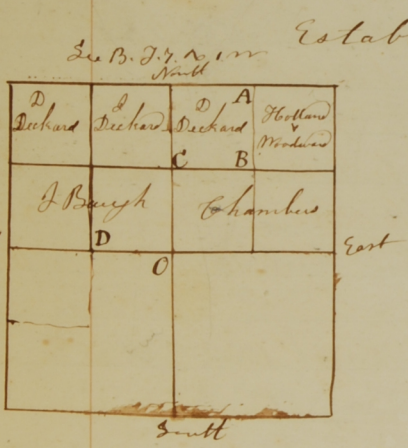

Established the following in Sec. 13. T. 7. R. 1 W.
 Cor A Beech 14. S 26 W. 23 1/2
 Beech 5. N 8 W. 21
 Cor B Beech 20 N 75 E. 23
 Beech 18. N 54 W. 27
 Cor C Beech 18. S 25 E. 18
 Beech 8. S 80 W. 24
 Cor D Hick 18. S 89 W. 14
 W. Oak 8. N 47 E. 23
 Cor E Beech 14. N 51 W. 18
 Maple 22 N 33 E. 22

Established at the same time the West 1/2 mile stake of Sec 11.
 T. 7. R. 1 W. Mt. Trees Beech 14. N 30 E. 23 1/2 (C & E Woodward)
 Honey Locust 4. S 63 E. 44
 J. W. Spencer M. C. Sarns
 & L. Woodburn Depts.

Established for Wm Roddy in Sec. 15 T. 7. R. 1 W.
 the following corners
 1st The N.E. cor of W. half of N.E. q. Mt. Trees Sug 14. S 50 W. 21 1/2
 Sug 7. S 40 E. 12
 cont

August the 17th 1861

Ran the following lines in Section 22 Town 10 Range No 1 East for the Trustees of the Honey Creek Church commenced at the N E corner of School House lot No 1 in said Section Town & Range ran N 85° E 5 poles & 12 links corner made and rock planted Witnefs B Ash 6 inches in Diam S 71½° E 22½ lbs dist thens S 5° E 12 poles & 12 links corner made and rock planted Witnefs B Oak 10 inches in Diam N 9° E 111 lbs dist thens S 69° W 5 poles & 18½ links to the S. E. corner of said School House lot thens N 5° W 11 poles & 3 links to the place of begining J. J. Hendrickson & J. J. Bates have Bars by consent for \$2-50 Donated

J. S. Buskirk. M. C. S.

August the 20th 1861

Ran the following lines in Section (11) Elwin Town (9) Nine Range (1) One East for William Mc Kee David West Jacob Swisher Jun & Jacob Swisher Sen commenced at the N. E. corner of Section 11 Ran S 81° W 81 poles & 6 links Witnefs Sugar 6 inches in diameter N 13° E 5 links dist Sugar 10 inches in diam S 55° E 21 links dist thens S 6° E 81 poles & 10 links Witnefs Hickory 11 inches in diameter N 71½° E 35½ lbs dist W Oak 30 " " S 13½° W 19 lbs dist thens S 6° E 81 poles & 10 links Witnefs B Oak 18 inches in diameter S 58° W 20 lbs dist W Oaks 28 inches in diameter N 15° E 61½ lbs dist thens N 6° W 12 poles & 16 links to a stake thens S 81° W 12 poles & 16 links to a stake thens S 76° W 36 poles & 1 links to a stake thens S 6° E 8 poles & 16 links to a stake thens N 81° E 28 poles & 9 links Chan Barers David Swisher & Stephen Dawson sworn } for William Mc Kee \$3-00 paid

David West " 1-50


Jacob Swisher Jun " 1-00 paid

Jacob Swisher Sen " 1-00 Paid

J. S. Buskirk. M. C. S.

Sec 11 T9R1E March 12, 1903

All interested parties having agreed to waive the statutory ten day's notice I met them on their representatives on above date and made the following survey as per plat and field notes. Geo. B. Raider acted as assistant Surveyor. Chain-bearers and flagmen served interchangeable and by agreement of all parties present Henry Mohr, Geo Gray, Edgar and Oscar Richardson, Wade H. Fielder, Harry Sawley, Moses Richardson were sworn in as assistants.




N	Chestnut Oak 4 S 68° 1 1/2° E 1 1/2	
	" 8 N 83° W 24 "	
O	New witnesses	
	Beech 8 N 63 1/2° E	36 3/4 "
D	W. Oak 8 S 19 1/2° E	43 1/2 "
	Beech 10 N 87 1/2° W	15 "
H	" 8 N 2 1/2° E	24 1/2 "
	Perpetuated	
H	Walnut 4 N 20° E	29 "
	B. Ash 16 S 28° E	42 1/2 "
B	B. Walnut 6 S 29° W	23 "
	B. " N 10 1/2° W	39 "
A	Hickory 4 N 5° E	18 1/2 "
	Dogwood 3 S 64 3/4° W	5 1/2 "
K	Hickory 10 N 4° E	73 3/4 "
	Ash 8 N E	52 "
M	W. Ash 8 S 23° E	3 "
	B " 16 N 84° W	24 1/2 "
I	New witnesses	
	B. Oak 3 S 45 1/2° E	28 "
	W Oak 3 N 89° W	28 "

I hereby certify the above to be a true and correct report of survey as made by me on above date, in witness whereof I hereby attach my hand and official Seal.

L. E. Pedersen M.S.



Sec 24. T
At the reg
Blum, Caly, and
established a
range one (1) eas
for assistants
Hudson and J

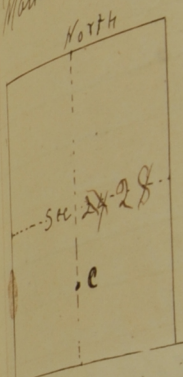

report to be the

Sec 16 T

correct rep
date. In
and aff